
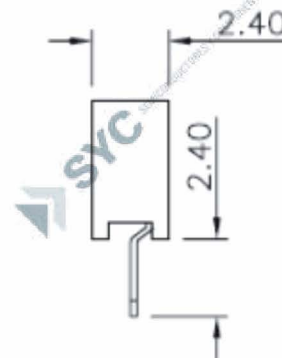
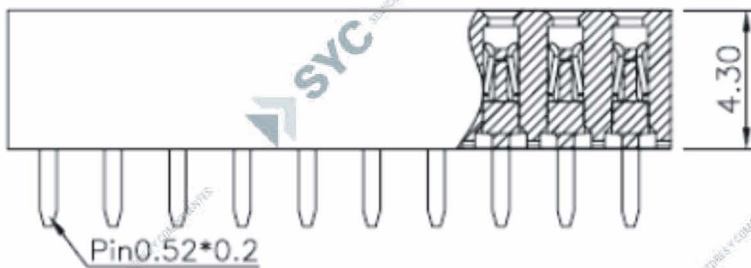
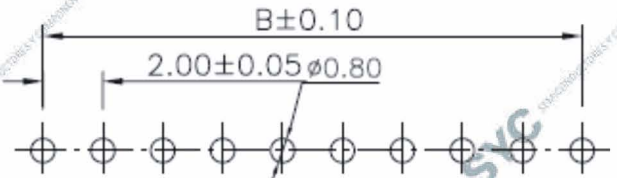


CODIGO

PBXXS-2MM


DESCRIPCION

Hembra 2mm X vias recto

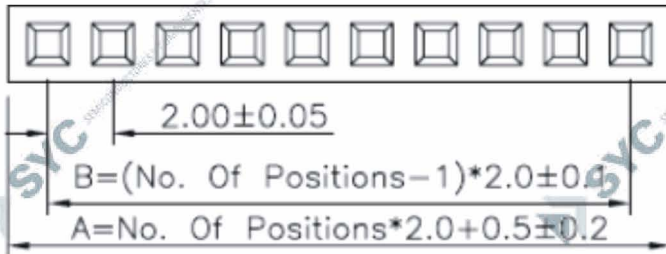

Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
2	4.50	2.00	10	20.50	18.00	23	46.50	44.00
3	6.50	4.00	11	22.50	20.00	25	50.50	48.00
4	8.50	6.00	12	24.50	22.00	28	56.50	54.00
5	10.50	8.00	13	26.50	24.00	30	60.50	58.00
6	12.50	10.00	14	28.50	26.00	33	66.50	64.00
7	14.50	12.00	15	30.50	28.00	35	70.50	68.00
8	16.50	14.00	18	36.50	34.00	38	76.50	74.00
9	18.50	16.00	20	40.50	38.00	40	80.50	78.00



Specifications:

Current rating: 2.0A AC, DC
 Voltage rating: 250V AC, DC
 Contact resistance: 20m ohm Max
 Insulation resistance: 1000M ohm Min
 Withstanding voltage: AC 500V AC/minute
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Materials:

Insulator: High Temp Plastic (PPS UL94V-0)
 Insulator Color: Black
 Contact: Phosphor Bronze
 Finish: Selective Gold Plated