


SYC SEMICONDUCTORES Y COMPONENTES


PARANA 274
(C1017AAF) BUENOS AIRES
TEL/FAX: 4371-5300 (L.ROT)
www.sycelectronica.com.ar
info@sycelectronica.com.ar

| CODIGO | DESCRIPCION |
|---|---|
| 2323S-XXA | Borde de impreso flexible de X vias |

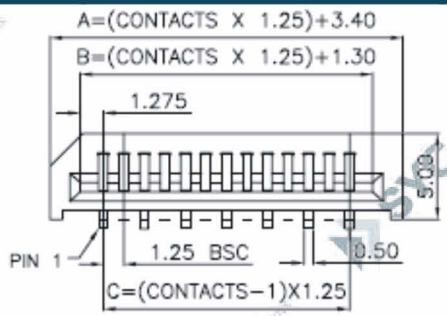





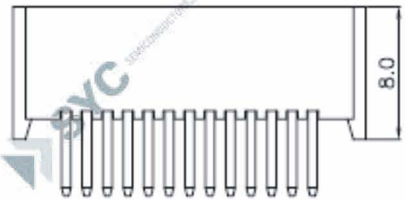

| Pin | Dim A | Dim B | Dim C | Dim D | Pin | Dim A | Dim B | Dim C | Dim D |
|---|---|---|---|---|---|---|---|---|---|
| 3 | 7.15 | 5.05 | 2.50 | 3.25 | 17 | 24.65 | 22.55 | 20.00 | 20.75 |
| 4 | 8.40 | 6.30 | 3.75 | 4.50 | 18 | 25.90 | 23.80 | 21.25 | 22.00 |
| 5 | 9.65 | 7.55 | 5.00 | 5.75 | 19 | 27.15 | 25.05 | 22.50 | 23.25 |
| 6 | 10.90 | 8.80 | 6.25 | 7.00 | 20 | 28.40 | 26.30 | 23.75 | 24.50 |
| 7 | 12.15 | 10.05 | 7.50 | 8.25 | 21 | 29.65 | 27.55 | 25.00 | 25.75 |
| 8 | 13.40 | 11.30 | 8.75 | 9.50 | 22 | 30.90 | 28.80 | 26.25 | 27.00 |
| 9 | 14.65 | 12.55 | 10.00 | 10.75 | 23 | 32.15 | 30.05 | 27.50 | 28.25 |
| 10 | 15.90 | 13.80 | 11.25 | 12.00 | 24 | 33.40 | 31.30 | 28.75 | 29.50 |
| 11 | 17.15 | 15.05 | 12.50 | 13.25 | 25 | 34.65 | 32.55 | 30.00 | 30.75 |
| 12 | 18.40 | 16.30 | 13.75 | 14.50 | 26 | 35.90 | 33.80 | 31.25 | 32.00 |
| 13 | 19.65 | 17.55 | 15.00 | 15.75 | 27 | 37.15 | 35.05 | 32.50 | 33.25 |
| 14 | 20.90 | 18.80 | 16.25 | 17.00 | 28 | 38.40 | 36.30 | 33.75 | 34.50 |
| 15 | 22.15 | 20.05 | 17.50 | 18.25 | 29 | 39.65 | 37.55 | 35.00 | 35.75 |
| 16 | 23.40 | 21.30 | 18.75 | 19.50 | 30 | 40.90 | 38.80 | 36.25 | 37.00 |



Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:200V AC/DC
Contact Resistance:20m ohm. max.
Insulation Resistance:500M ohm. min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-25°C ~ +85°C
Material and Finish
Insulator:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Tin Plated
How To Order
2323S-XXA
- A:Standard Type
- No. Of Positions
- S: Straight Type
- Series No.

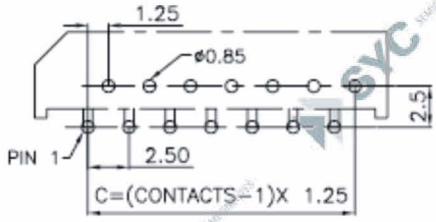


Recommended P.C.Board Layout(STD)