

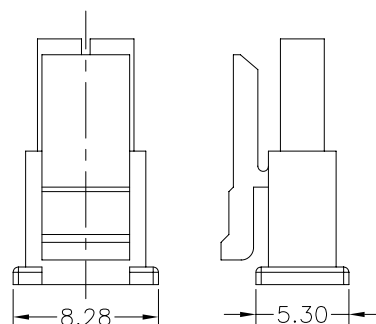

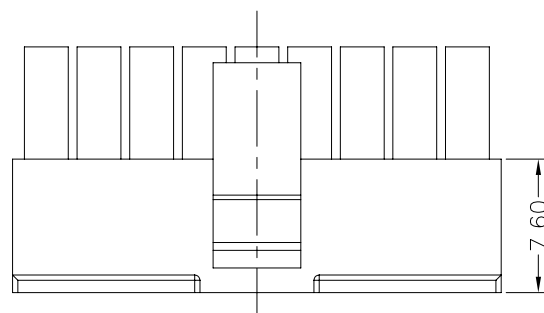

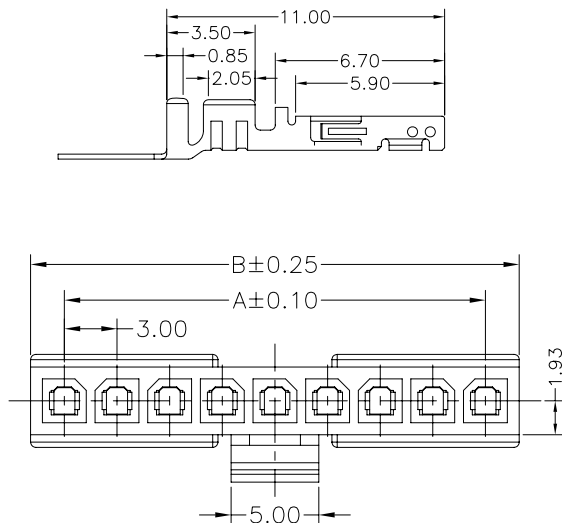






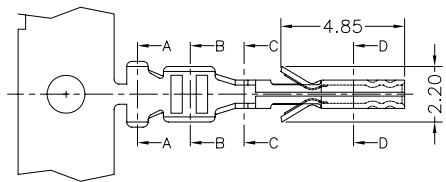

(2PIN Circuit Housing)

Specifications:

Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1.500V AC/Minute
Operating Temperature Range:-25°C~+105°C
Application Wire:AWG #20~#24
Material and Finish
Insulator:Nylon66 UL94V-0
Color:Black
Contact:Phosphor Bronze
Plating:Tin Plated
Mating With:5560T terminal
How To Order
5560A-XX



No.of Positions
Housing Single Row

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	3.00	See detail	8	21.00	24.85
3	6.00	9.85	9	24.00	27.85
4	9.00	12.85	10	27.00	30.85
5	12.00	15.85	11	30.00	33.85
6	15.00	18.85	12	33.00	36.85
7	18.00	21.85			

RoHS Compliant

GENERAL TOLERANCE:


.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 2

PROJECTION: 

DESCRIPTION:

3.0mm Single Row Receptacle Housing

PART NO:

5560A-XX

SIZE

A4


1

2


3

4


5




2PIN




6PIN




10PIN




3PIN

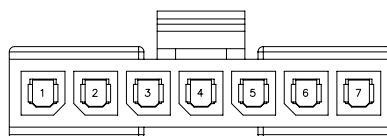


7PIN

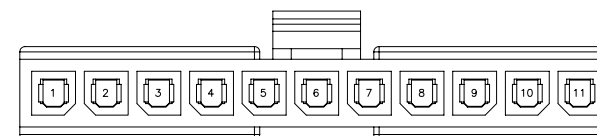


11PIN




4PIN

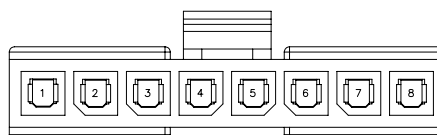


8PIN

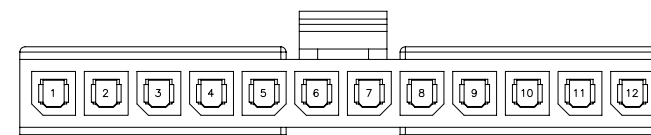

12PIN



5PIN

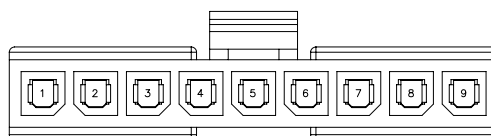

9PIN

2~12P Protection Key Drawing(Ref.)

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.10

.XX=±0.05


.XXX=±0.02

UNIT: MM

SCALE: 1:1

SHEET: 2 / 2

PROJECTION:



DESCRIPTION:

3.0mm Single Row Receptacle Housing

PART NO:

5560A-XX

SIZE

A4