

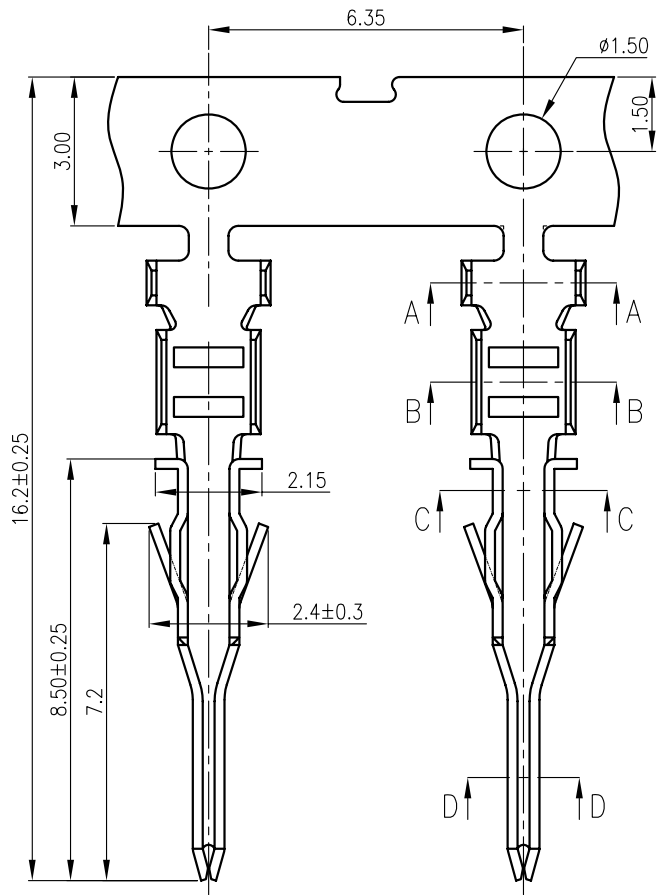



A-A





B-B



C-C



D-D

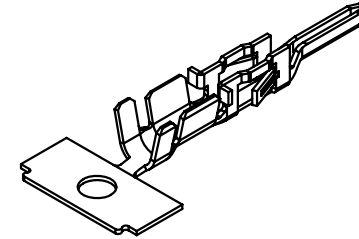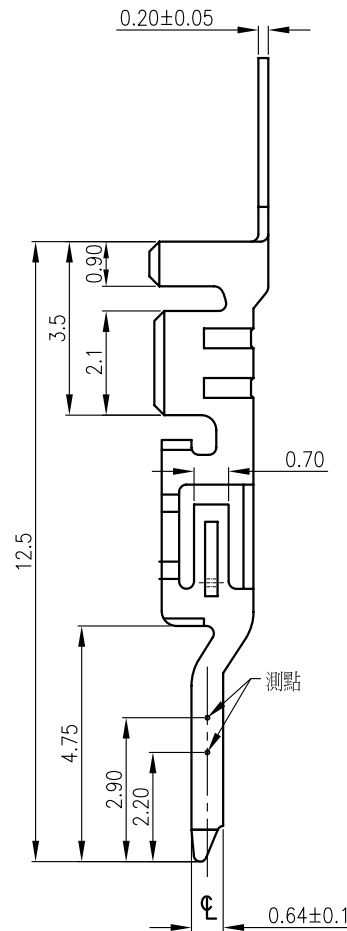

Specifications:

Current Rating: 5.0A AC/DC #22AWG
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Withstanding Voltage: 1,500V AC/minute
 Operating Temperature Range: -25°C ~ +85°C
 Application Wires: AWG 20 to 24
 Mates With 5561 Series Housing
 Material and Finish
 Contact: Phosphor Bronze
 Finish: Tin Plated
 Packing: 10,000 pcs/Reel

How To Order

5561TX-XX

Blank: Phosphor Bronze
 BS: Brass
 Blank: Tin Plated
 G: Gold Plated
 T: Terminal

RoHS Compliant

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
UNIT: MM	DESCRIPTION: 3.0mm Wire to Wire Terminal		SIZE A4
SCALE: 1:1			
SHEET: 1/1	PART NO: 5561TX-XX		
PROJECTION: 