


SYC SEMICONDUCTORES Y COMPONENTES

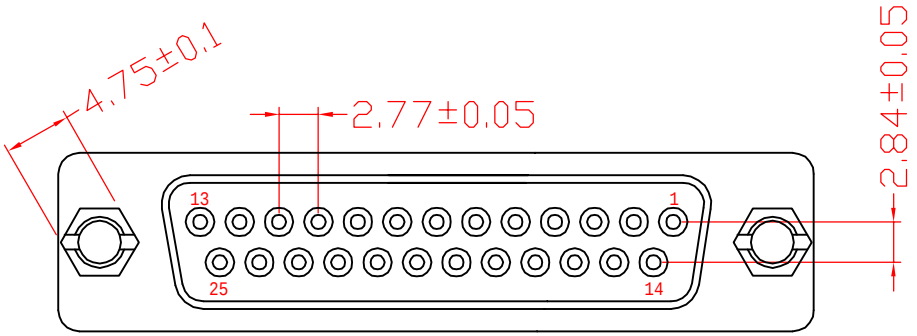


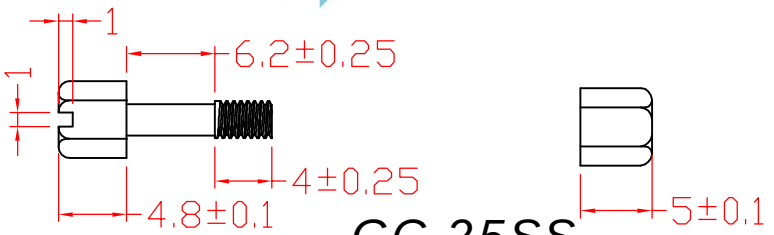


GC-25SS

GENDER CHANGER 25S A 25S



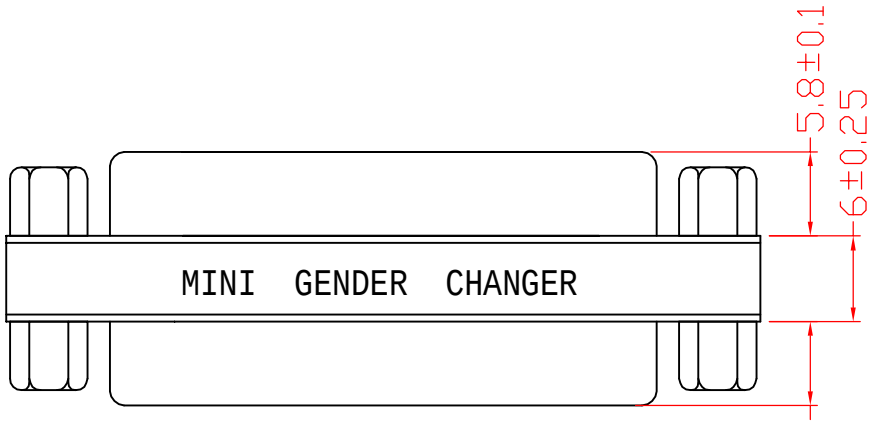

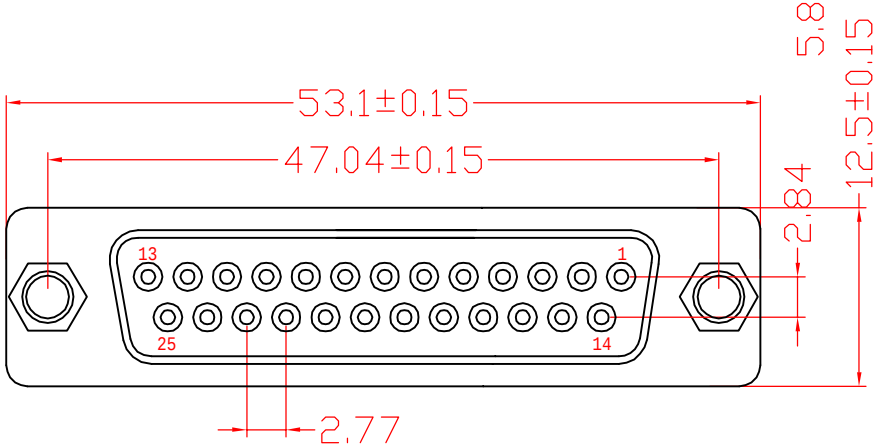

Label:yellow color with black charactor
One side:MINI GENDER CHANGER
The other side:U.S.A. PATENT 5199906 GENDER CHANGER
SPECIFICATION
INSULATOR:PBT Glass fibre reinforced UL 94 VO
CONTACT:Brass
CONTACT PLATING:Gold plated over nickel
SHELL:Tin Plated Shell
CURRENT RATING:3 AMP
DIELECTRIC STRENGTH:1000V AC for one minute
INSULATOR RESISTANCE:1000MΩ min at 500V DC
TEMPERATURE:-55℃--+105℃