



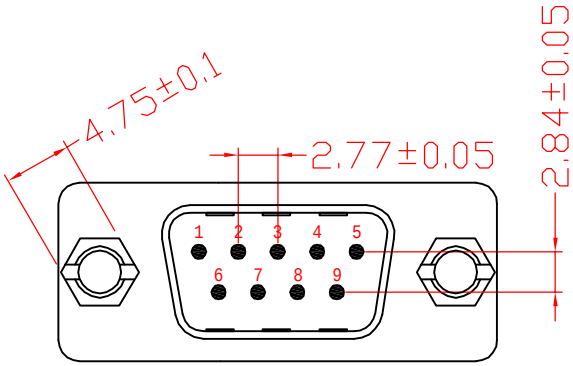


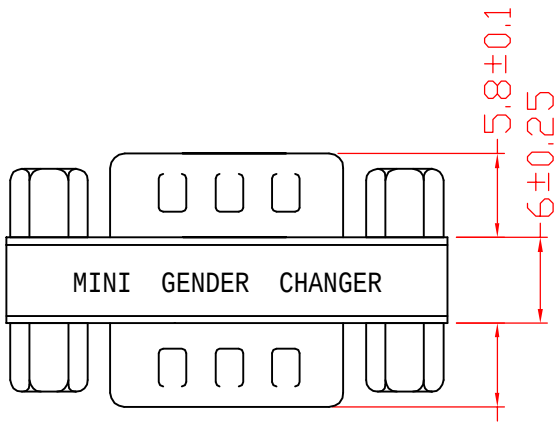

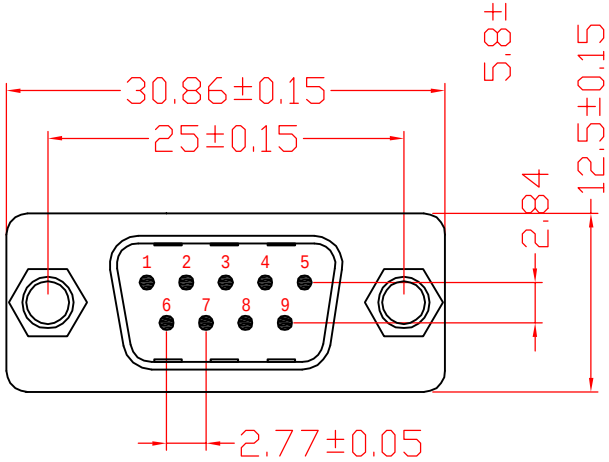

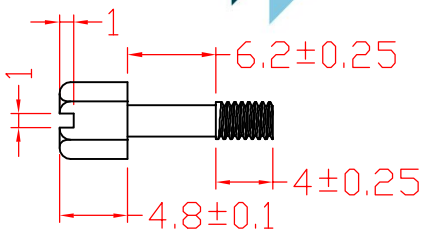



GC-9PP

GENDER CHANGER 9P A 9P

1	———	1
2	———	2
3	———	3
4	———	4
5	———	5
6	———	6
7	———	7
8	———	8
9	———	9
SHELL	———	SHELL

Label:yellow color with black charactor
One side:MINI GENDER CHANGER
The other side:U.S.A. PATENT 5199906 GENDER CHANGER
SPECIFICATION
INSULATOR:PBT Glass fibre reinforced UL 94 VO
CONTACT:Brass
CONTACT PLATING:Gold plated over nickel
SHELL:Tin Plated Shell
CURRENT RATING:3 AMP
DIELECTRIC STRENGTH:1000V AC for one minute
INSULATOR RESISTANCE:1000MΩ min at 500V DC
TEMPERATURE:-55℃--+105℃