




Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20m ohm max.
Withstanding Voltage:500V AC/minute
Insulation Resistance:1000M ohm min.
Temperature Rating:−40°C ~ +105°C
Materials:
Insulator:High Temperature Plastic (UL94V−0)
Contact Material:Copper Alloy
Finish:Selective Gold Plated



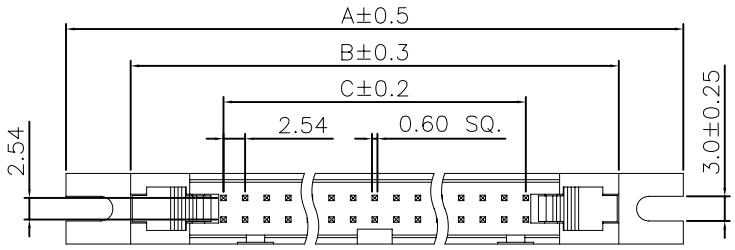


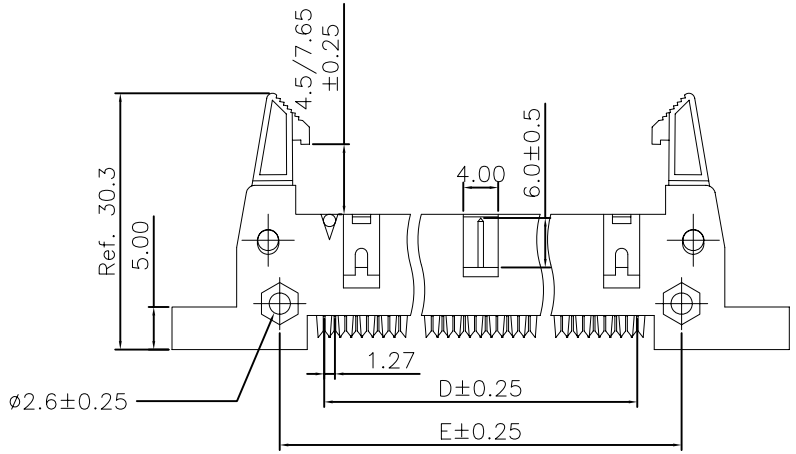







Short Latch



Long Latch

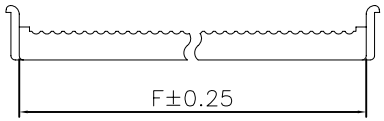



No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
10	46.90	31.90	10.16	11.43	21.90	15.2
14	51.98	36.98	15.24	16.51	26.98	20.28
16	54.52	39.52	17.78	19.05	29.52	22.82
20	59.60	44.6	22.86	24.13	34.6	27.9
24	64.68	49.68	27.94	29.21	39.68	32.98
26	67.22	52.22	30.48	31.75	42.22	35.52
30	72.30	57.30	35.56	36.83	47.3	40.6
34	77.38	62.38	40.64	41.91	52.38	45.68
40	85.00	70.0	48.26	49.53	60.0	53.3
50	97.7	82.7	60.96	62.23	72.7	66.0
60	110.40	95.40	73.66	74.93	85.40	78.7
64	115.48	100.48	78.74	80.01	90.48	83.78

RoHS Compliant

GENERAL TOLERANCE:
.X=±0.2
.XX=±0.15

UNIT: mm
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

DESCRIPTION:
2.54mm Ejector IDC Box Header With Ear Type

PART NO:
IDPXX

SIZE
A4