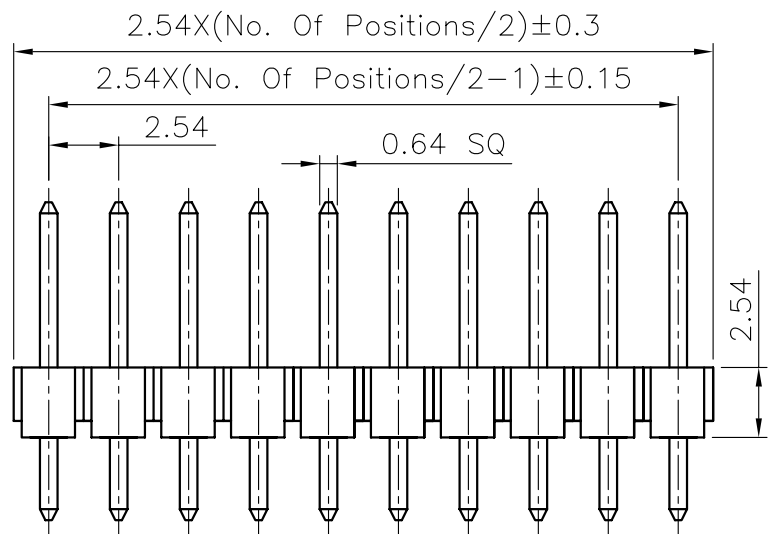
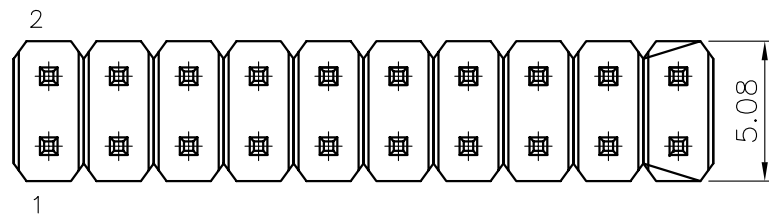


PCB Layout

Specifications:
 Current rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:600V AC For one Minute
 Operating Temperature Range:-40°C To +105°C
 Materials:
 Insulator:PBT (UL94V-0)
 Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated,Tin Plated,Selective Gold Plated

RoHS Compliant

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		MACHO .1"X.1" 40 V L=27.0MM	
UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Row Straight Type		SIZE
SCALE: 1:1	PART NO:		A4
SHEET: 1 / 1	PLD40-270		
PROJECTION:			