
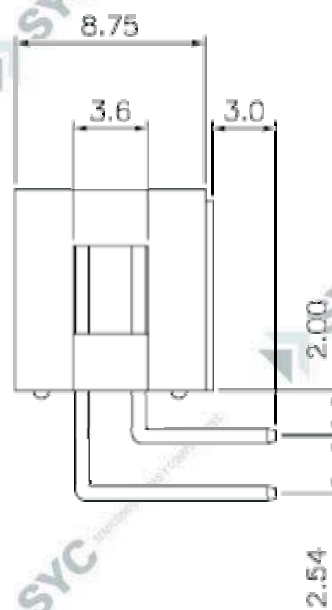
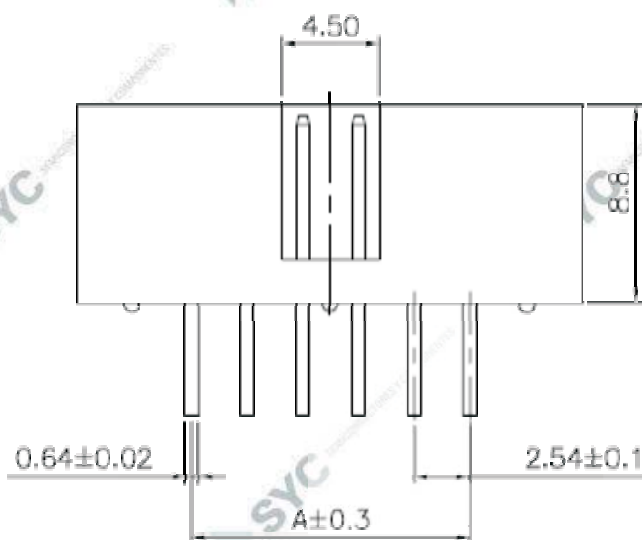
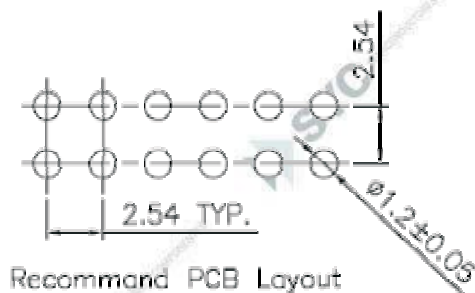


CODIGO

SCMXXR-W

DESCRIPCION

Macho p/CI sin orejas a 90° de 2*X vias

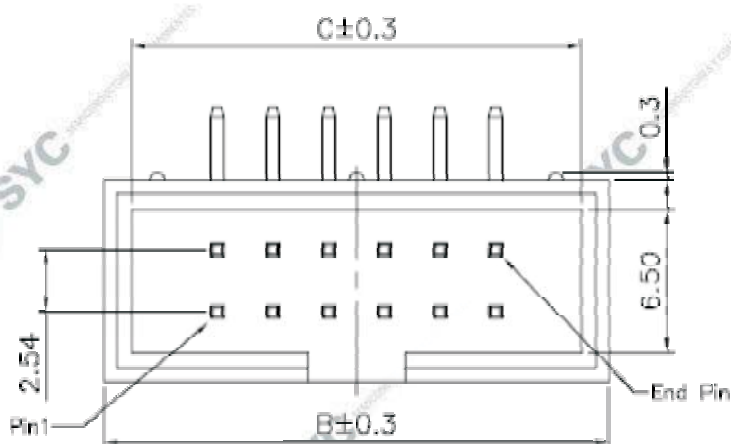

SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 40°C to + 105°C
- Contact Resistance : 20mΩ max

BOX HEADER

- Poles : 6-64
- Material : Contact : Brass, Gold Plated
Base : PBT UL94V-0
- Q' ty : 1000 pcs./PVC Box

Poles	Dimensions (mm)		
	A	B	C
6	5.08	15.24	12.94
8	7.62	17.78	15.48
10	10.16	20.32	18.02
12	12.70	22.86	20.56
14	15.24	25.40	23.10
16	17.78	27.94	25.64
20	22.86	33.02	30.72
24	27.94	38.10	35.80
26	30.48	40.64	38.34
30	35.56	45.72	43.42
34	40.64	50.80	48.50
40	48.26	58.42	56.12
44	53.34	63.50	61.20
50	60.96	71.12	68.82
60	73.66	83.82	81.52
64	78.74	88.90	86.60