
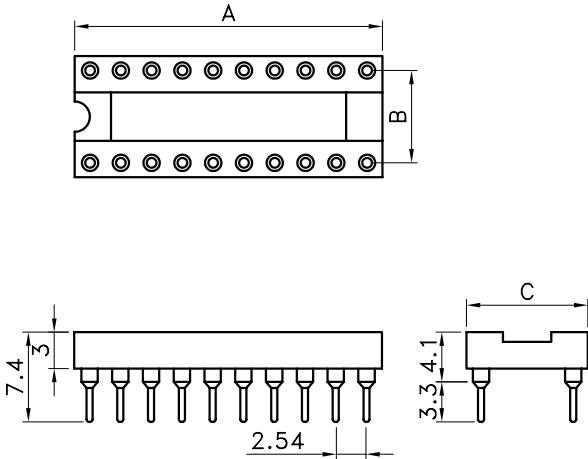


CIRCUITS	DIM. A	DIM. B	DIM. C	SPACE
6	7.62	7.62	10.16	03
8	10.16	7.62	10.16	
14	17.78	7.62	10.16	
16	20.32	7.62	10.16	
24	30.48	15.24	17.78	06
28	35.56	15.24	17.78	
32	40.64	15.24	17.78	
40	50.80	15.24	17.78	

MATERIAL & FINISH

- * Contact: Beryllium Copper (BeCu)
- * Sleeve: Brass
- Plating: G=Gold Plated
T=Tin Plated
- * Insulator: IC Socket=PBT (UL94V-0)
- * Insertion Standard Force: 300g max.
- * Extraction Standard Test: 60g min.
- * PBT Heat resisting durability: Max. 160~180°C, 5 Sec.
- * Current Rating: 1A
- * Operating Humidity Range: Annual mean 75%
- * Contact Resistance : 10 Milliohm
- * Insulator Resistance : 5000 Mege Ohm at 500 VDC
- * Dielectric Strength : 1000 VRMS Min
- * Rated Voltage : 100 VRMS / 150VDC
- * Temperature: - 55°C TO + 125°C

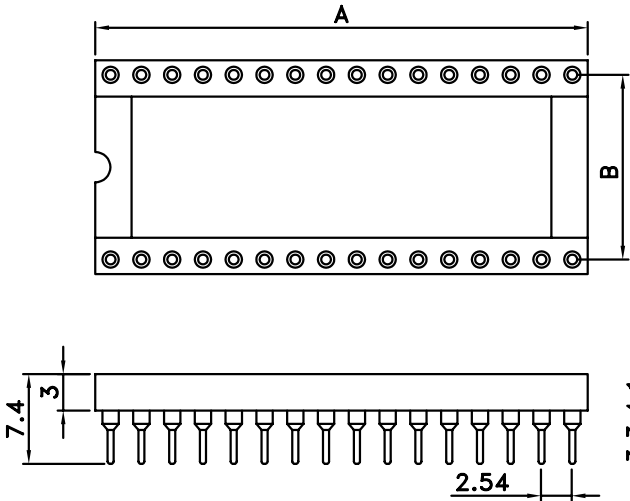

F				DRAWN: J	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
E								
D				CHECKED:	UNIT: MM	DESCRIPTION: SCREW MACHINE PIN IC SOCKET	SIZE	
C					SCALE:			
				APPROVAL:	SHEET: 1 / 1	PART NO: SCSXX-T	A4	D
G					PROJECTION: 			
REV	DATE	FILE	BY					